

### CATV 860MHz 18dB Push-pull Amplifier Module

## 1. Product profile

### 1.1 General description

Hybrid high dynamic range amplifier module operating at a supply voltage of 24V(DC) in an SOT115J package. The module consists of two cascaded stages both in cascode configuration

#### CAUTION



This device is sensitive to Electro Static Discharge (ESD). Therefore care should be taken during transport and handling.

### 1.2 Features and benefits

- Excellent linearity
- Low noise
- Low return loss
- High gain

### 1.3 Applications

- CATV systems operating in the 50MHz to 860MHz frequency range.

### 1.4 Quick reference data


Bandwidth 50MHz to 860MHz;  $V_B = 24V$ ;  $T_{mb} = 30\text{ }^\circ\text{C}$ ;  $Z_S = Z_L = 75\Omega$

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$G_p$	power gain	$f = 50\text{MHz}$	18.0	18.8	20.0	dB
		$f = 860\text{MHz}$	18.7	-	-	dB
$I_{tot}$	total current	$V_B = 24V$	200	210	220	mA


## 2. Pin information

Pin	Description
1	input
2	common
3	common
5	+ $V_B$
7	common
8	common
9	output

Simplified Outline



Graphic Symbol



## 3. Operating conditions

### 3.1 Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134) (TA = +25°C)

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V <sub>B</sub>	-	25	V
Input Voltage [1]	V <sub>i</sub>	-	60	dBmV
Operating Case Temperature	T <sub>c</sub>	-20	+100	°C
Storage Temperature	T <sub>stg</sub>	-40	+100	°C

[1] In case of single tone

### 3.2 Recommended operating conditions (Z<sub>S</sub> = Z<sub>L</sub> = 75Ω)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Supply Voltage	V <sub>B</sub>		23.5	24.0	24.5	V
Operating Case Temperature	T <sub>c</sub>		-20	+25	+85	°C

## 4. Electrical characteristics


(T<sub>c</sub> = 30±5°C, V<sub>B</sub> = 24V, Z<sub>S</sub> = Z<sub>L</sub> = 75Ω)

Parameter	Symbol	Test Conditions	MIN	TYP	MAX	Unit
Power Gain	G <sub>p</sub>	f = 50 MHz	18.0	18.8	20.0	dB
Gain Slope	SL	f = 50MHz to 860MHz	0.7	1.2	2.2	dB
Gain Flatness	FL	f = 50MHz to 860MHz	-	-	±0.4	dB
Noise Figure	NF	f = 860MHz	-	-	7.5	dB
Operating Current	IB	V <sub>B</sub> =24VDC, RF OFF	200	210	220	mA
Composite Triple Beat	CTB	84channels, Flat output level across the band V <sub>o</sub> =40dBmV at 743.25 MHz,	-	-64	-	dB
Cross Modulation	XM		-	-65	-	dB
Composite 2nd Order Beat	CSO		-	-64	-	dB
Input Return Loss	S11	f = 50 to 700MHz	18	-	-	dB
		f = 700 to 860MHz	16	-	-	
Output Return Loss	S22	f = 50 to 700 MHz	16	-	-	dB
		f = 700 to 860MHz	16	-	-	

## 5. Package outline

Rectangular single-ended package; aluminum flange; 2 vertical mounting holes; 2 x 6-32 UNC and 2 extra horizontal mounting holes; 7 gold-plated in-line leads.

SOT115J

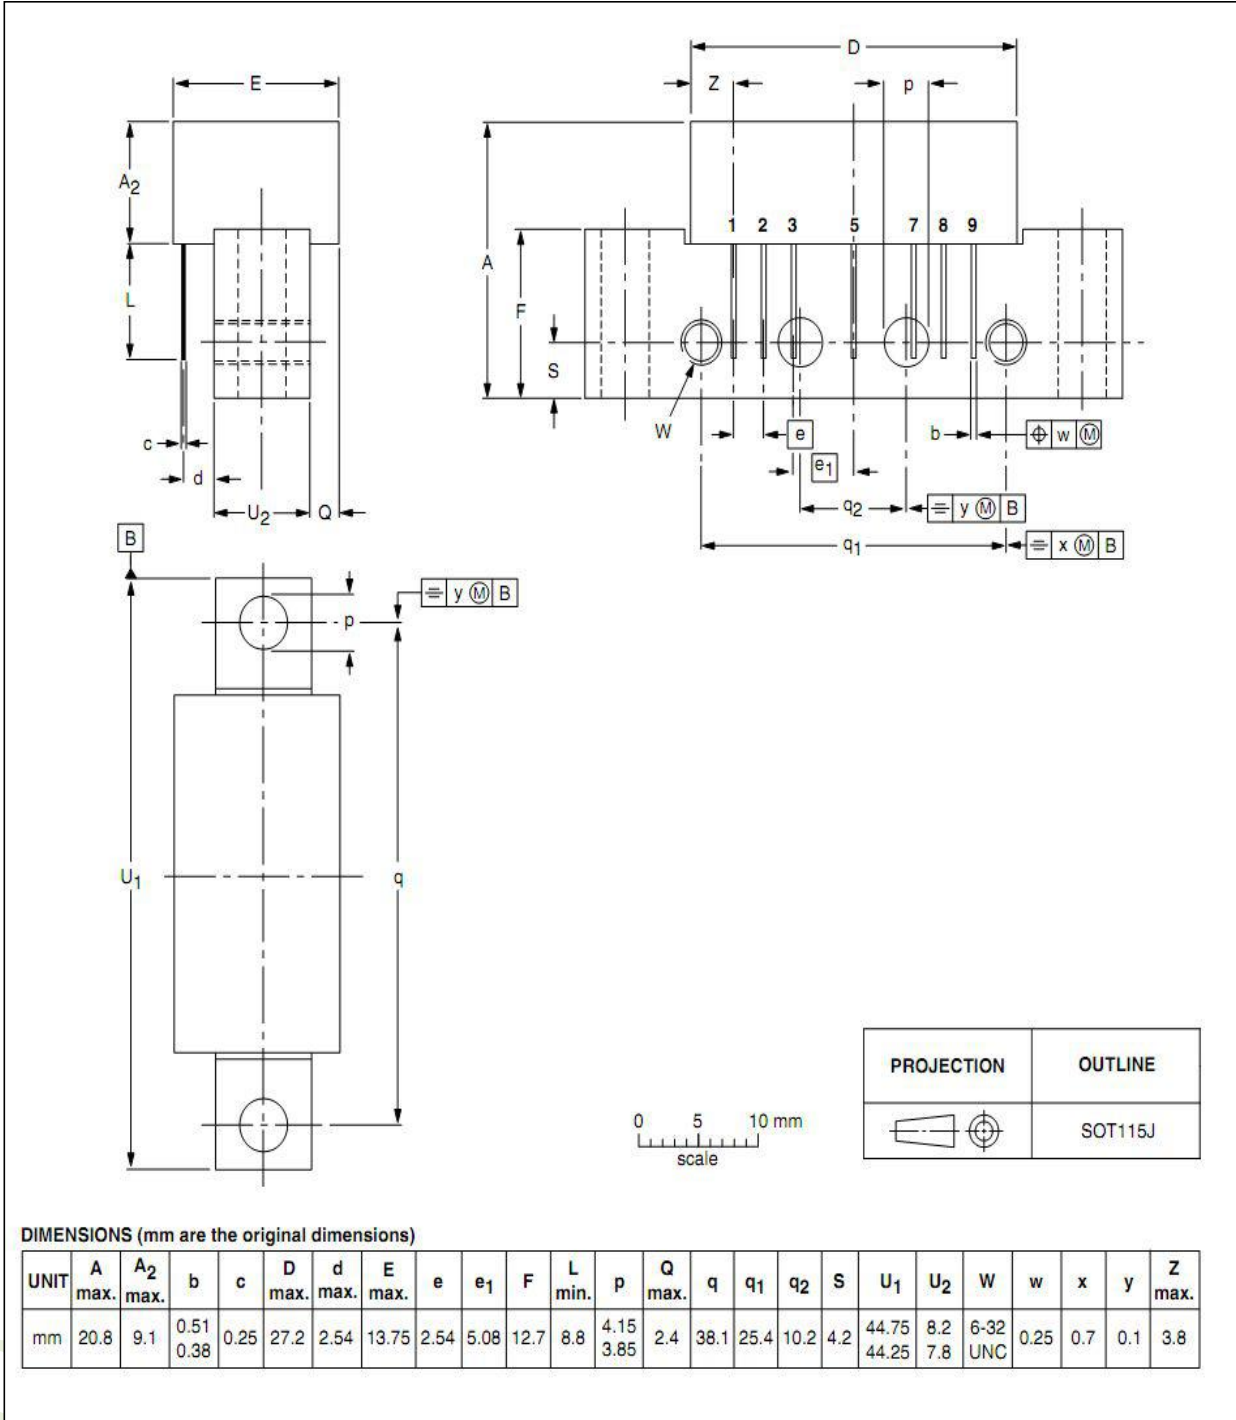

UNIT: mm

Comm Devices MFG Inc. 917 Westridge Dr. Milpitas, CA 95035

For sales or technical support, contact CDM at +1 408 809 6208 or [customerservice@lineardevicesinc.com](mailto:customerservice@lineardevicesinc.com)

The information in this publication is believed to be accurate. However, no responsibility is assumed by Comm Devices MFG Inc. ("CDM") for its use, nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of CDM. CDM reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.