

200 MHz CATV 34dB Reverse Amplifier Module

1. Product profile

1.1 General description

Hybrid high dynamic range amplifier module designed for applications in CATV systems. with a bandwidth of 5 MHz to 200 MHz operating at a voltage supply of 24 V (DC) in a SOT115J package.

CAUTION



This device is sensitive to Electro Static Discharge (ESD). Therefore care should be taken during transport and handling.

1.2 Features and benefits

- Excellent linearity
- Low noise
- Low return loss
- Rugged construction

1.3 Applications

- Reverse amplifier in two-way CATV systems.

1.4 Quick reference data


Bandwidth 5 MHz to 200 MHz; $V_B = 24\text{ V}$; $T_{mb} = 30\text{ }^\circ\text{C}$; $Z_S = Z_L = 75\ \Omega$

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-----------|---------------|---------------------|------|------|------|------|
| G_p | power gain | $f = 10\text{ MHz}$ | 33.5 | 34.0 | 35.0 | dB |
| I_{tot} | total current | $V_B = 24\text{ V}$ | 130 | 145 | 160 | mA |


2. Pin information

| Pin | Description |
|-----|-------------|
| 1 | input |
| 2 | common |
| 3 | common |
| 5 | + V_B |
| 7 | common |
| 8 | common |
| 9 | output |

Simplified Outline

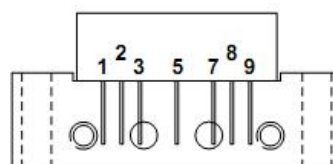

Graphic Symbol



3. Operating conditions

3.1 Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134) (TA = +25°C)

| Parameter | Symbol | Min | Max | Unit |
|----------------------------|------------------|-----|------|------|
| Supply Voltage | V _B | - | 25 | V |
| Input Voltage [1] | V _i | - | 65 | dBmV |
| Operating Case Temperature | T _c | -20 | +100 | °C |
| Storage Temperature | T _{stg} | -40 | +100 | °C |

[1] In case of single tone

3.2 Recommended operating conditions (Z_S = Z_L = 75 Ω)

| Parameter | Symbol | Test Conditions | MIN. | TYP. | MAX. | Unit |
|----------------------------|----------------|-----------------|------|------|------|------|
| Supply Voltage | V _B | | 23.5 | 24.0 | 24.5 | V |
| Operating Case Temperature | T _c | | -20 | +25 | +80 | °C |

4. Electrical characteristics


(T_c = 30±5°C, V_B = 24 V, Z_s = Z_L = 75 Ω) 0

| Parameter | Symbol | Test Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------------|----------------|---|------|------|------|------|
| Power Gain | G _p | f = 10 MHz | 33.5 | 34.0 | 35.0 | dB |
| Gain Slope | SL | f = 5 to 200 MHz | 0 | 0.5 | 1.0 | dB |
| Gain Flatness | FL | f = 5 to 200 MHz | - | - | ±0.3 | dB |
| Noise Figure | NF | f = 200 MHz | - | 5.0 | 6.0 | dB |
| Operating Current | I _B | V _B =24VDC, RF OFF | 130 | 145 | 160 | mA |
| Composite Triple Beat | CTB | | - | -67 | - | dB |
| Cross Modulation | XM | 17 channels, flat output level across the band VO = 50dBmV at 200.25 MHz, | - | -66 | - | dB |
| Composite 2nd Order Beat | CSO | | - | -70 | - | dB |
| Input Return Loss | S11 | f = 5 to 200 MHz | 17 | - | - | dB |
| Output Return Loss | S22 | f = 5 to 200 MHz | 17 | - | - | dB |

5. Package outline

Rectangular single-ended package; aluminum flange; 2 vertical mounting holes; 2 x 6-32 UNC and 2 extra horizontal mounting holes; 7 gold-plated in-line leads.

SOT115-B

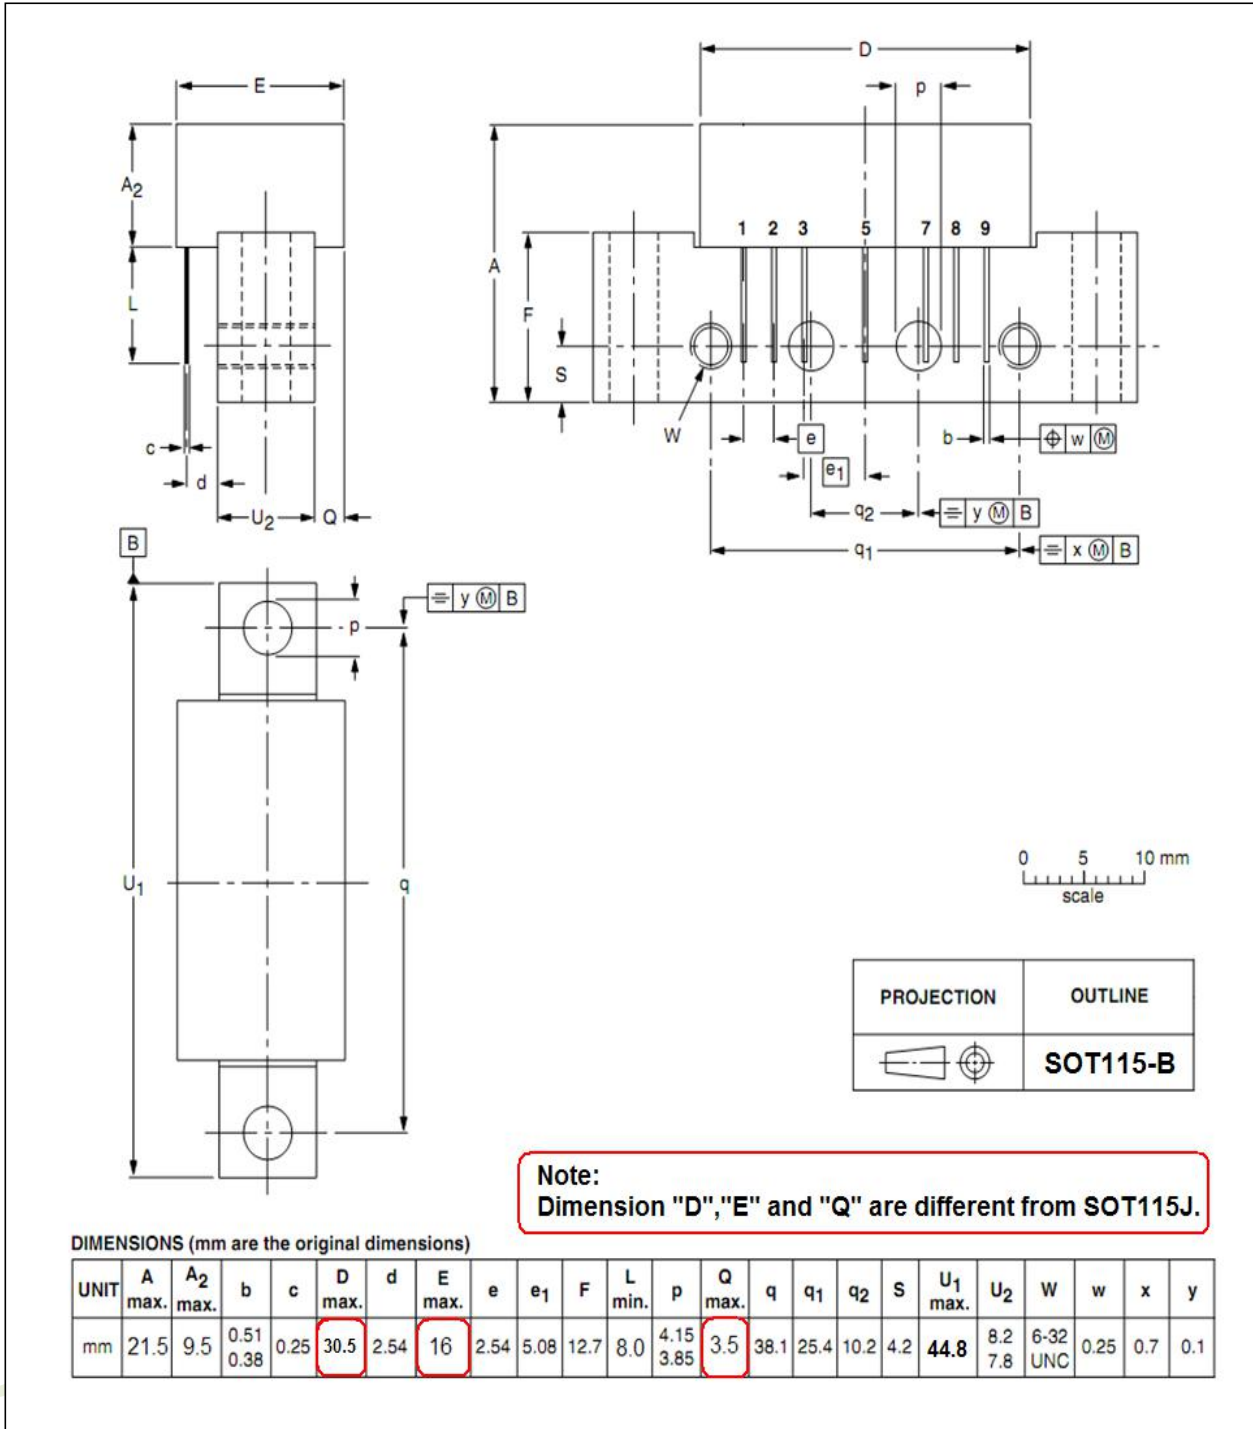

UNIT: mm

Comm Devices MFG Inc. 917 Westridge Dr. Milpitas, CA 95035

For sales or technical support, contact CDM at +1 408 809 6208 or customerservice@lineardevicesinc.com

The information in this publication is believed to be accurate. However, no responsibility is assumed by Comm Devices MFG Inc. ("CDM") for its use, nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of CDM. CDM reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.