

### 1.2GHz 22dB Gain With GaAs Power Double Amplifier Module

## 1. Product profile

### 1.1 General description

High dynamic range power doubler amplifier module operating at a supply voltage of 24VDC in an SOT115 package, using a cascaded power doubler GaAs MMIC , matching with SMT transformer at input and output port adding ESD and surge protective devices.

#### CAUTION



This device is sensitive to Electro Static Discharge (ESD). Therefore care should be taken during transport and handling.

### 1.2 Features and benefits

- n Excellent linearity
- n Low noise
- n Ultra-low CSO/CTB/XMOD
- n Rugged construction
- n High reliability

### 1.3 Applications

- n CATV systems operating in the 40MHz to 1.2GHz frequency range.

### 1.4 Quick reference data


Bandwidth 40MHz to 1.2GHz;  $V_B = 24\text{ V}$ ;  $T_{mb} = 30\text{ }^\circ\text{C}$ ;  $Z_S = Z_L = 75\text{ }\Omega$ .

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$G_p$	power gain	$f = 50\text{MHz}$	21.5	22.0	23.0	dB
		$f = 1.2\text{GHz}$	22.5	-	-	dB
$I_{tot}$	total current	$V_B = 24\text{ V}$	430	455	480	mA


## 2. Pin information

Pin	Description
1	input
2	common
3	common
5	+ $V_B$
7	common
8	common
9	output

**Simplified Outline**

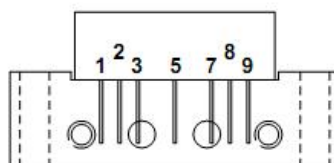

**Graphic Symbol**



## 3. Operating conditions

### 3.1 Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134) (TA = +25°C)

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V <sub>B</sub>	-	25	V
Input Voltage <sup>[1]</sup>	V <sub>i</sub>	-	60	dBmV
Operating Case Temperature	T <sub>C</sub>	-20	+90	°C
Storage Temperature	T <sub>stg</sub>	-40	+100	°C

[1] In case of single tone

### 3.2 Recommended operating conditions (Z<sub>S</sub> = Z<sub>L</sub> = 75 Ω)

Parameter	Symbol	Test Conditions	MIN	TYP	MAX	Unit
Supply Voltage	V <sub>B</sub>		23.5	24.0	25.0	V
Operating Case Temperature	T <sub>C</sub>		-20	+30	+80	°C


## 4. Electrical characteristics

(T<sub>C</sub> = 30±5°C, V<sub>B</sub> = 24V, Z<sub>S</sub> = Z<sub>L</sub> = 75 Ω)

Parameter	Symbol	Test Conditions	MIN	TYP	MAX	Unit
Power Gain	G <sub>p</sub>	f = 50MHz	21.5	22.0	23.0	dB
Gain Slope	SL	f = 50 to 1.2GHz	1.0	1.5	2.5	dB
Gain Flatness	FL	f = 50 to 1.2GHz	-	-	±0.5	dB
Noise Figure	NF	f = 1.2GHz	-	5.0	6.0	dB
Operating Current	I <sub>B</sub>	V <sub>B</sub> =24V DC, RF OFF	430	455	480	mA
Composite Triple Beat	CTB	98 channels, V <sub>o</sub> = 50dBmV at 855.25 MHz, flat output level across the band	-	-66	-	dB
Cross Modulation	XM		-	-64	-	dB
Composite 2nd Order Beat	CSO		-	-67	-	dB
Input Return Loss	S <sub>11</sub>	f = 40 to 700MHz	16	-	-	dB
		f = 700MHz to 1.2GHz	14	-	-	dB
Output Return Loss	S <sub>22</sub>	f = 40 to 700MHz	16	-	-	dB
		f = 700MHz to 1.2GHz	14	-	-	dB

5. Package outline

Rectangular single-ended package; aluminum flange; 2 vertical mounting holes; 2 x 6-32 UNC and 2 extra horizontal mounting holes; 7 gold-plated in-line leads.

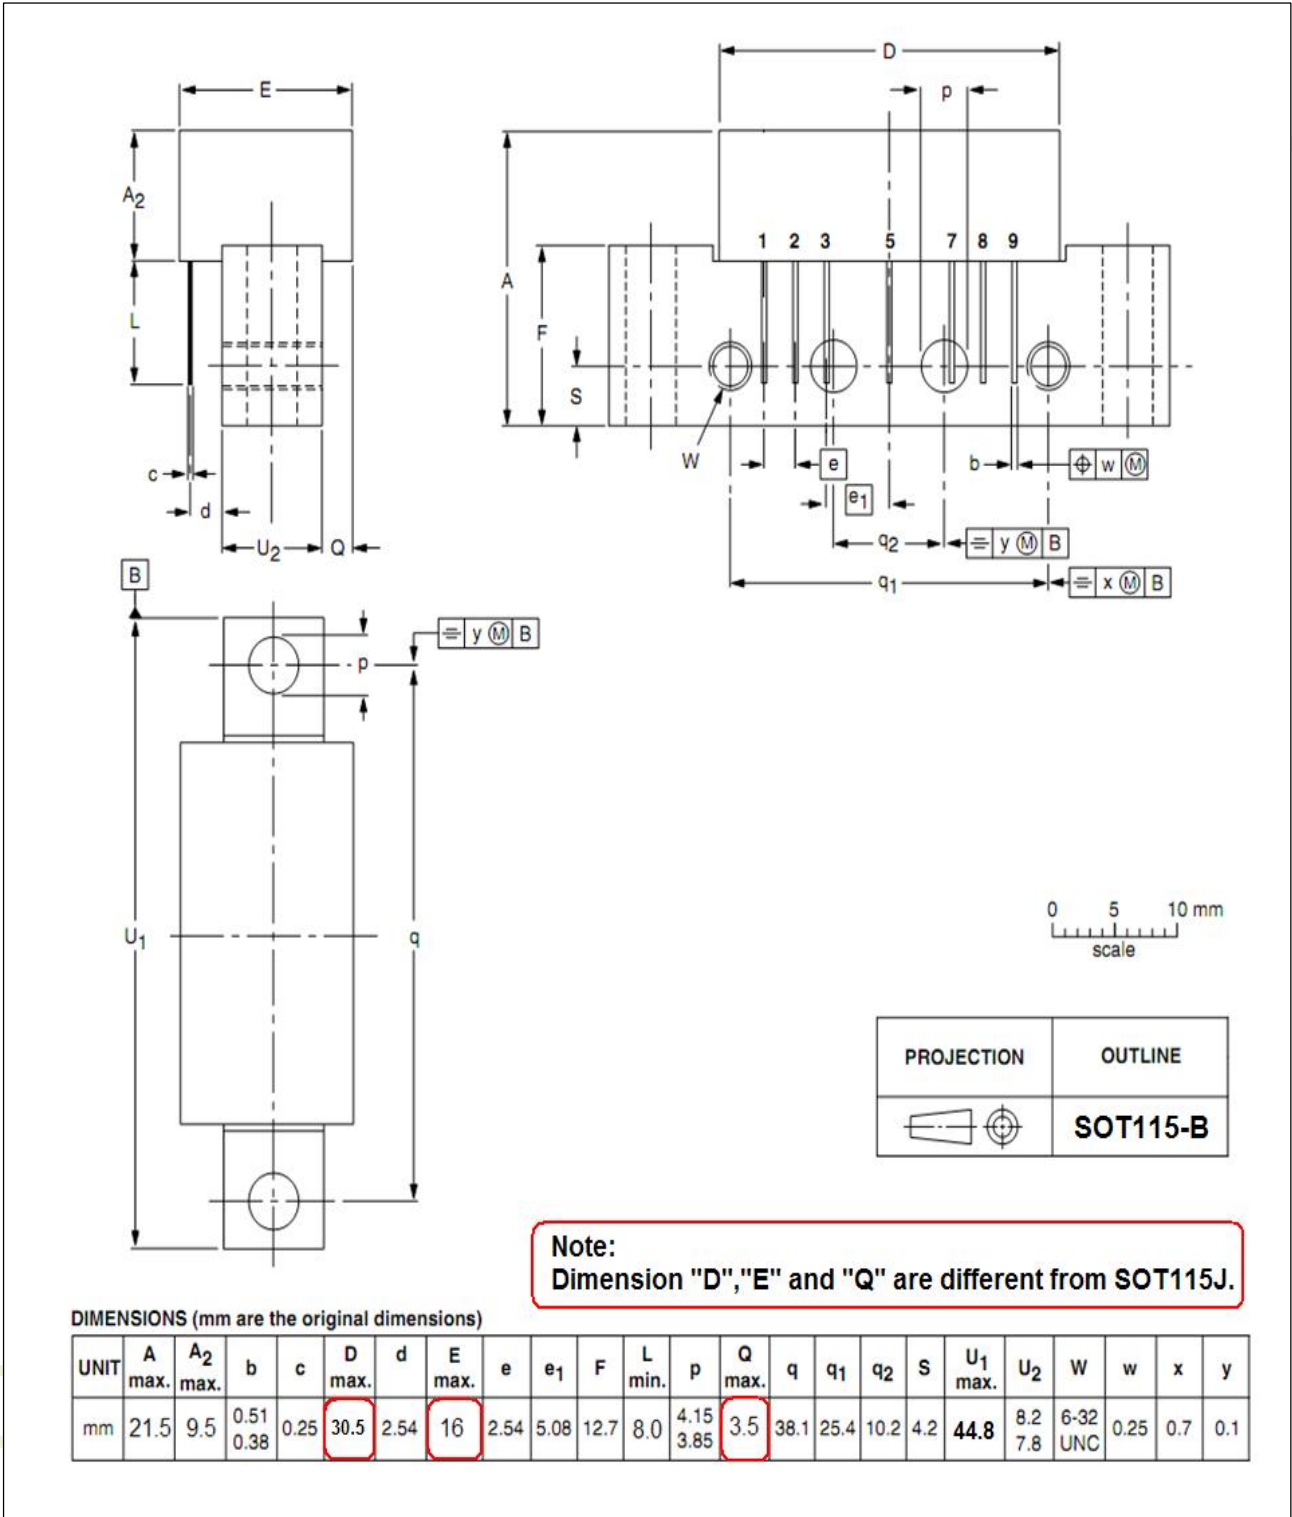

Note:  
Dimension "D", "E" and "Q" are different from SOT115J.

UNIT: mm

Comm Devices MFG Inc. 917 Westridge Dr. Milpitas, CA 95035

For sales or technical support, contact CDM at +1 408 809 6208 or [customerservice@lineardevicesinc.com](mailto:customerservice@lineardevicesinc.com)

The information in this publication is believed to be accurate. However, no responsibility is assumed by Comm Devices MFG Inc. ("CDM") for its use, nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of CDM. CDM reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.